




JEDERMANN


Fahrzeugleuchten

MULTImann

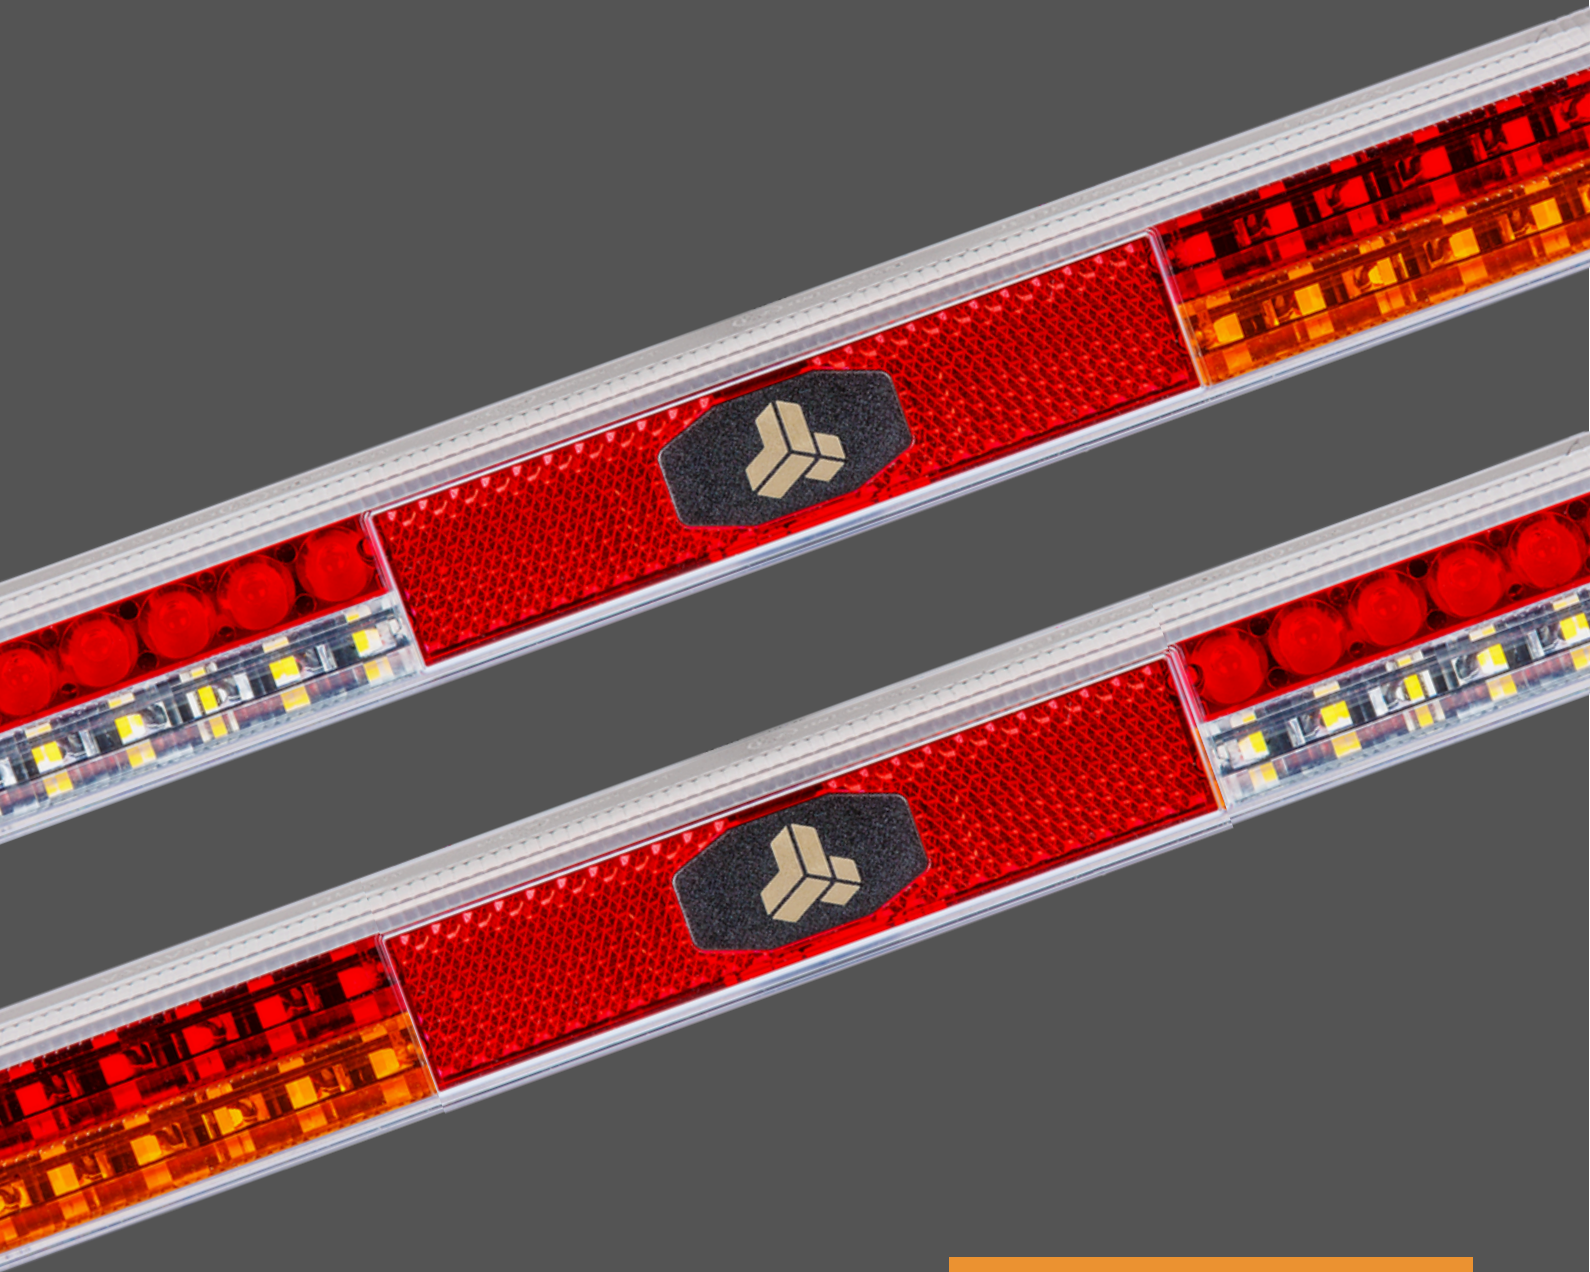

Maximum
functionality in a
compact housing


MULTImann

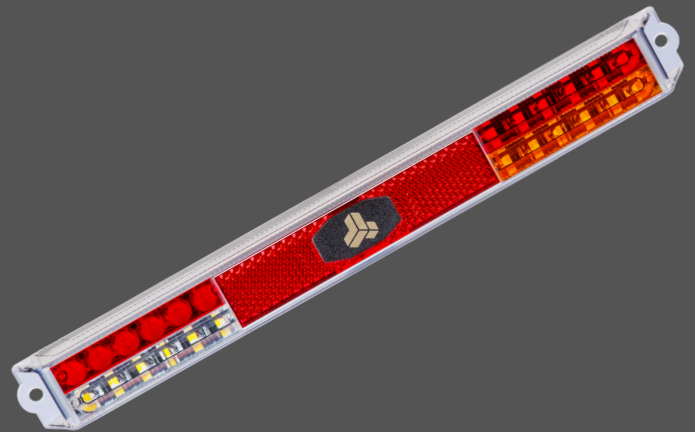

Description

The MULTImann light combines a wide range of functions in a compact housing. With dimensions of 253 mm in length and 27 mm in width, it delivers five distinct lighting functions and an optional integrated reflector within a minimal footprint. The MULTImann can be mounted both horizontally and vertically, making it an ideal solution for customers with limited installation space for lighting components.

Characteristics

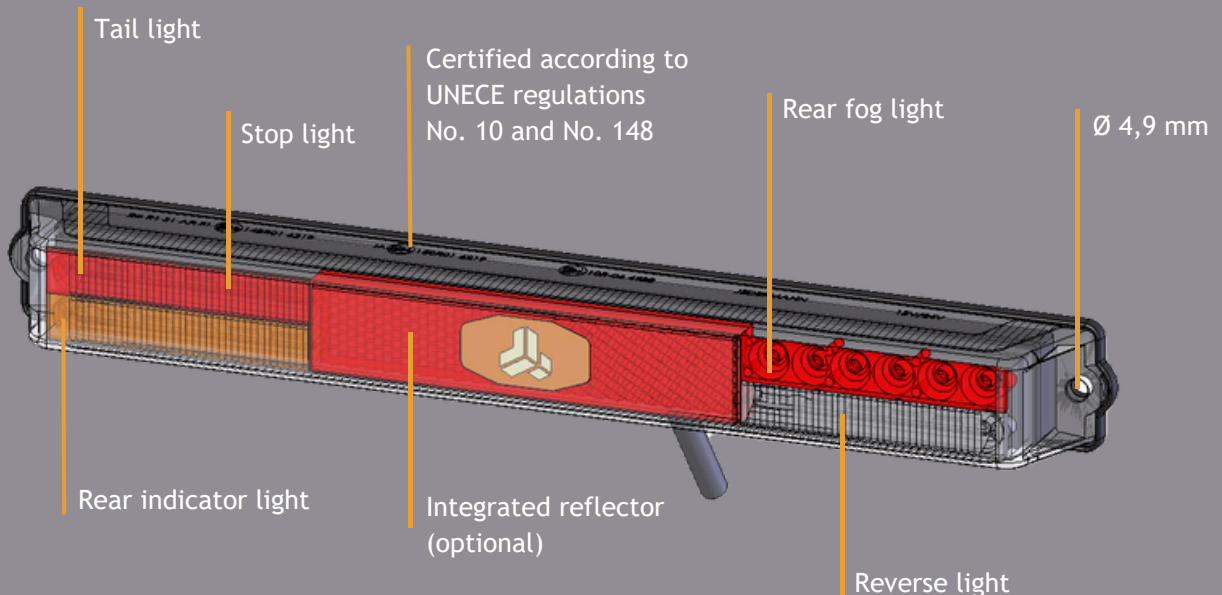


 ADR approved

 Protection class IP6K9K

 Voltage range 10 V to 30 V

 Operating temperature range: -30 °C to +60 °C


Technical drawing

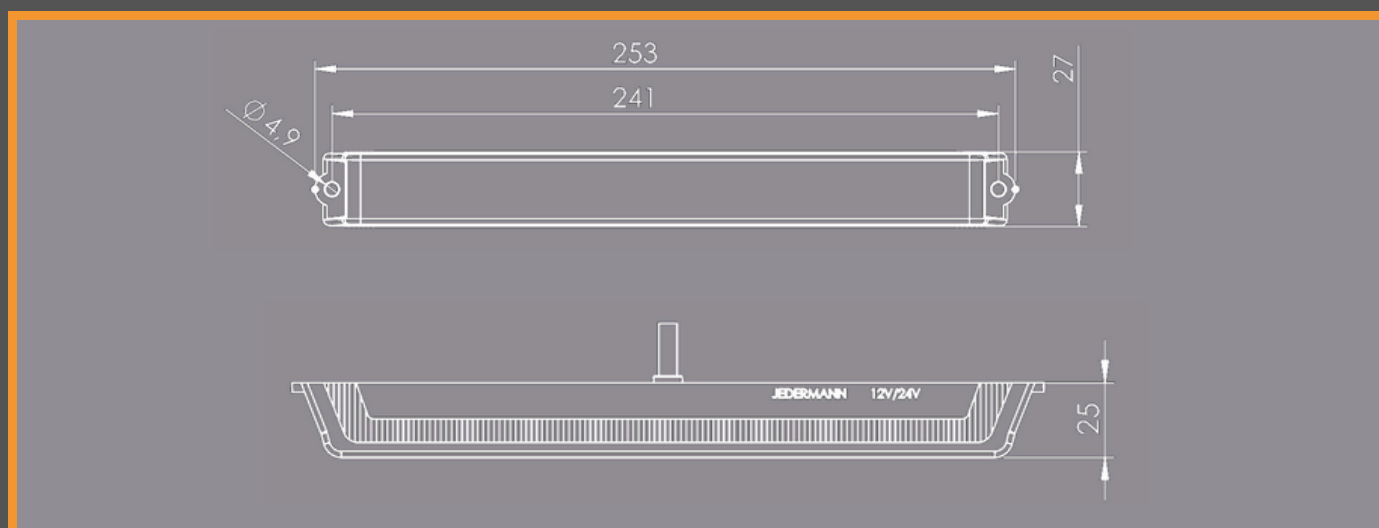

Electrical ratings

Version	Function	Wire colour	12 V [W]	24 V [W]
Five Functions	Tail light	black	0,5	1,0
	Stop light	red	4,0	4,0
	Rear indicator light	yellow	1,0	2,5
	Rear fog light	red	3,0	3,5
	Reverse light	black	2,0	2,5

Five Functions with integrated reflector

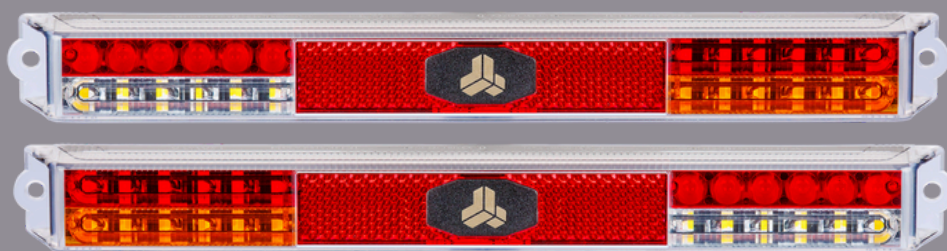

Article Number	Mounting side	Pulse signal	Reflector	Center cap	Cable length
L004-026-001	right	ISO13207-1	Reflector	black	0,5 m
L004-026-002	left	ISO13207-1	Reflector	black	0,5 m
L004-026-003	right	ISO13207-1	Reflector	white	0,5 m
L004-026-004	left	ISO13207-1	Reflector	white	0,5 m
L004-026-005	right	-	Reflector	black	0,5 m
L004-026-006	left	-	Reflector	black	0,5 m
L004-026-007	right	-	Reflector	white	0,5 m
L004-026-008	left	-	Reflector	white	0,5 m
L004-026-009	right	ISO13207-1	Reflector	red	0,5 m
L004-026-010	left	ISO13207-1	Reflector	red	0,5 m
L004-026-011	right	-	Reflector	red	0,5 m
L004-026-012	left	-	Reflector	red	0,5 m

Five Functions without integrated reflector



Article Number	Mounting side	Pulse signal	Reflector	Center cap	Cable length
L004-025-001	right	ISO13207-1	-	black	0,5 m
L004-025-002	left	ISO13207-1	-	black	0,5 m
L004-025-003	right	ISO13207-1	-	white	0,5 m
L004-025-004	left	ISO13207-1	-	white	0,5 m
L004-025-005	right	ISO13207-1	-	red	0,5 m
L004-025-006	left	ISO13207-1	-	red	0,5 m
L004-025-007	right	-	-	black	0,5 m
L004-025-008	left	-	-	black	0,5 m
L004-025-009	right	-	-	white	0,5 m
L004-025-010	left	-	-	white	0,5 m
L004-025-011	right	-	-	red	0,5 m
L004-025-012	left	-	-	red	0,5 m