



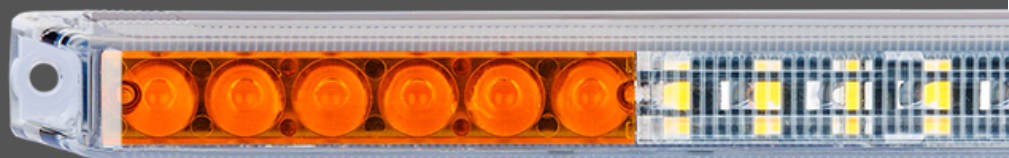


JEDERMANN

Fahrzeugleuchten

SLIMmann S

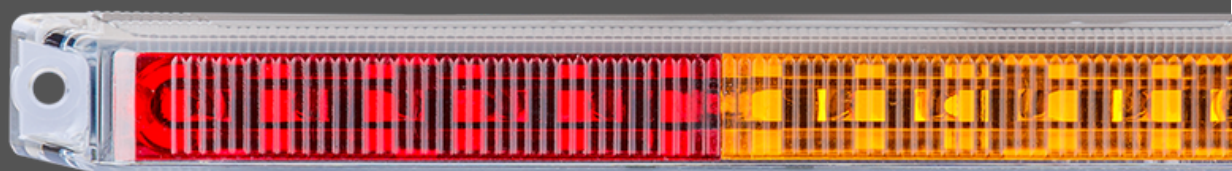

Compact
yet
powerful

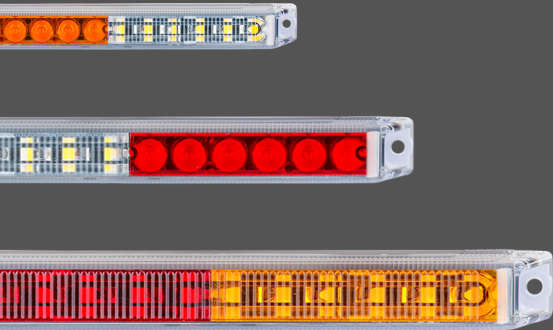


SLIMmann S

Description

The SLIMmann S series stands out with its compact design. With a length of only 148 mm and a width of just 15 mm, it combines up to 3 functions in one housing. Upon request, it can also output a pulse according to ISO 13207-1.

Characteristics

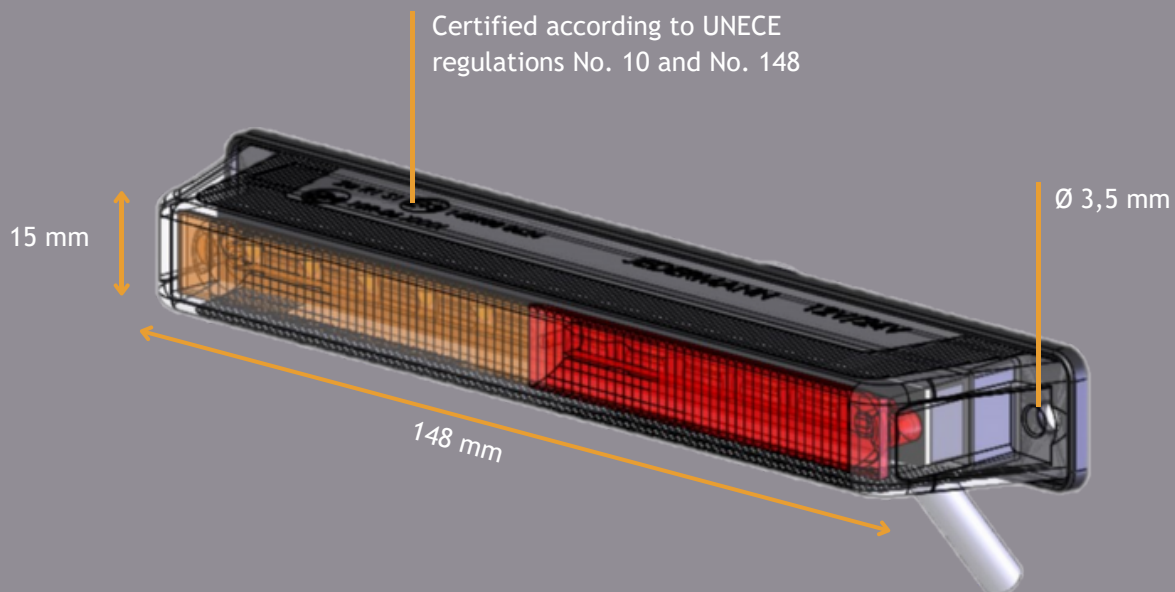

ADR approved



Protection class IP6K9K




Voltage range 10 V to 30 V



Operating temperature range: -30 °C to +60 °C


Technical drawing

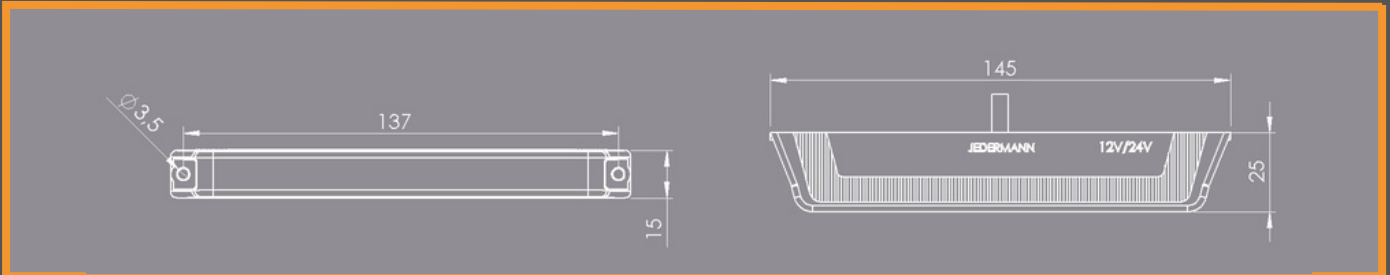

Electrical ratings

Version	Function	Wire colour	12 V [W]	24 V [W]
Combined brake, turn signal, and tail light	Tail light	black	0,3	0,9
	Stop light	red	3,2	3,7
	Rear indicator light	yellow	0,9	1,9
Combined rear fog and reverse light	Rear fog light	red	2,5	2,8
	Reverse light	black	1,9	1,9
Front indicator light with marker light	Front indicator light	red	1,9	2,9
	Outline marker light	black	0,8	1,8
Tail light		brown	0,3	0,5
Third brake light		brown	1,6	3,6
Directional warning light amber		red	6,0	6,0
Directional warning light blue		red	10,0	10,0

Combined brake, turn signal, and tail light

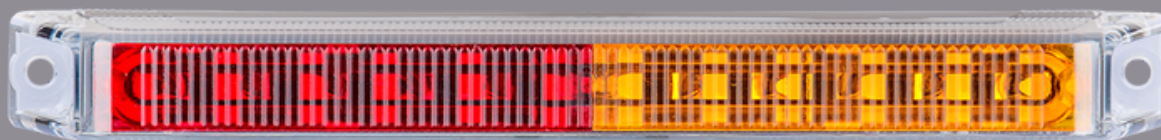


Article Number	Pulse signal	Cable length
L001-010-001	ISO13207-1	0,5 m
L001-010-002	-	0,5 m

Combined rear fog and reverse light



Article Number	Cable length
L001-011-001	0,5 m

Front indicator light with outline marker light

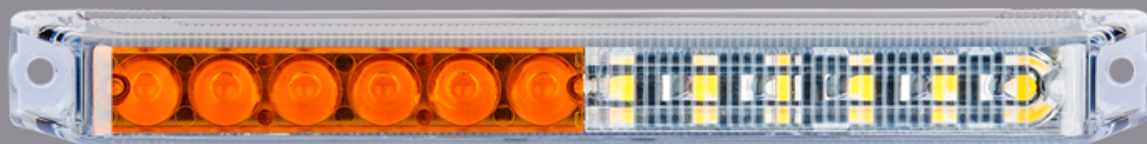


Article number	Pulse signal	Cable length
L001-012-001	ISO13207-1	0,5 m
L001-012-002	-	0,5 m

Tail light




Article number	Cable length
L001-013-001	0,5 m

Third brake light

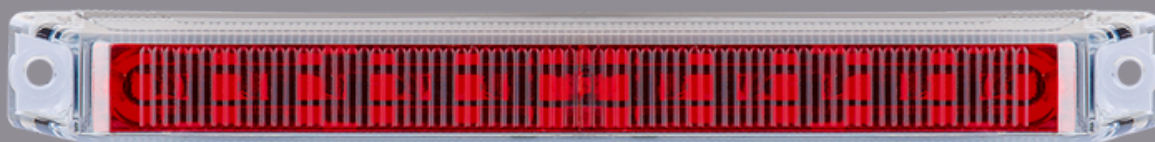

Article number	Cable length
L001-014-001	0,5 m

Directional warning light amber

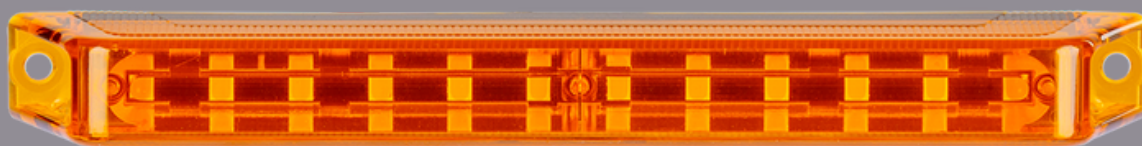


Article number	Cable length
L001-027-001	0,5 m



JEDERMANN

Fahrzeugleuchten

Directional warning light blue

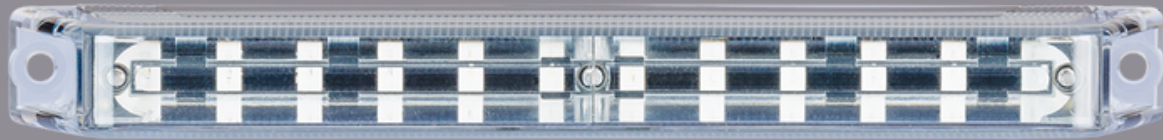

Article number	Cable length
L001-028-001	0,5 m



Hauptstraße 33
56291 Hausbay



Jedermann AG
info@jedermann-ag.de



06746-208