




JEDERMANN

Fahrzeugleuchten

WINGmann I



Compact,
high-
performance
design

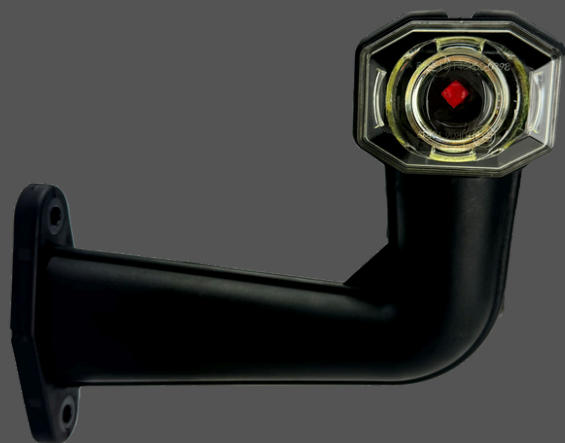

WINGmann I

Description

The WINGmann I - one of our end outline marker lights - impresses with its versatility and flexible construction. The robust rubber arm, made of high-quality TPE material, ensures high mobility and exceptional durability. Available in various mounting configurations - including pendulum, mini, 90° arm, and short arm - the WINGmann I offers the right solution for any application. Its combination of outstanding flexibility and long-lasting materials makes it the ideal choice for demanding operational environments.

Electrical ratings

Version	Wire colour	12V [W]	24V [W]
90° - arm	brown	0,5	1,1
Short	brown	0,5	1,1
Mini	brown	0,5	1,1
Pendulum	brown	0,5	1,1



JEDERMANN


Fahrzeugleuchten

WINGmann I

90° - arm

Characteristics

Ø 6,5 mm

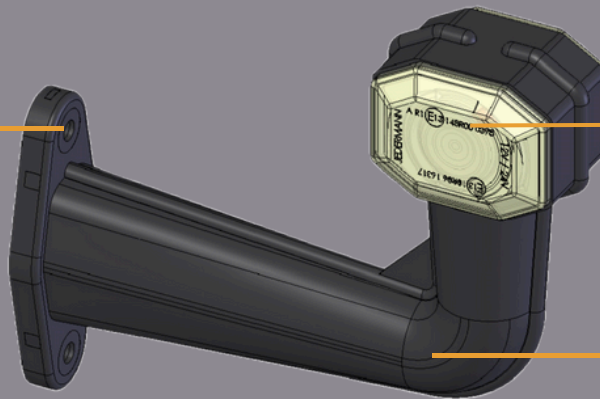

Certified according to
UNECE regulations
No. 10 and No. 148

Flexible arm made out
of TPE-material



ADR approved



Voltage range 10 V to 30 V



Protection class IP6K9K




Operating temperature range: -30 °C to +60 °C



Customizable cable length and connector options

Technical drawing

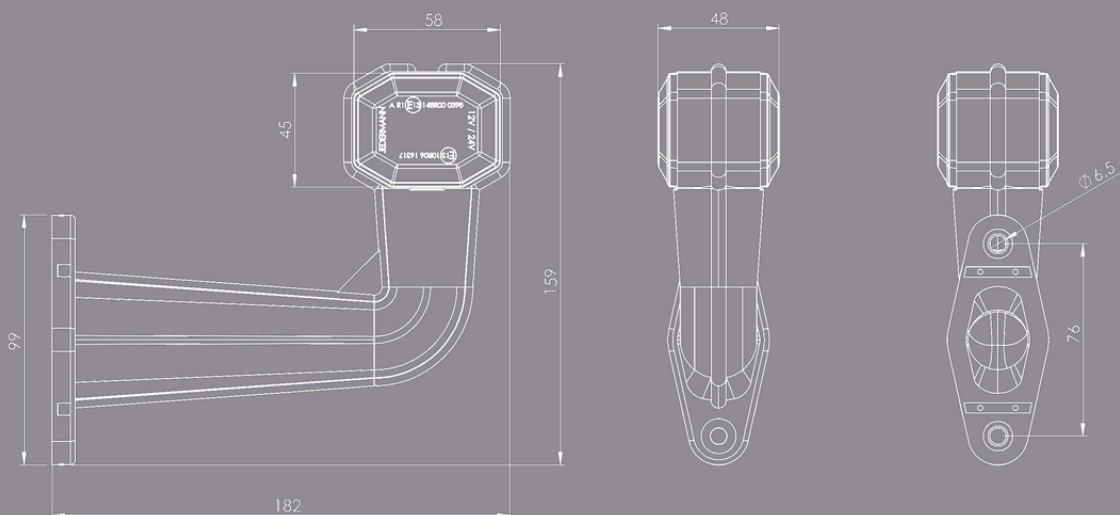

Hauptstraße 33
56291 Hausbay



Jedermann AG
info@jedermann-ag.de



06746-208

Article numbers



Article number	Mounting side	Connection	Cable length
L020-015-001	right	Open cable end	1,75 m
L020-015-002	left	Open cable end	1,75 m
L020-015-003	right	Open cable end	0,5 m
L020-015-004	left	Open cable end	0,5 m
L020-015-005	right	P&R connector	1,75 m
L020-015-006	left	P&R connector	1,75 m



JEDERMANN

Fahrzeugleuchten

WINGmann I

Short arm

Characteristics

Flexible arm made out of TPE-material

Ø 6,5 mm

Certified according to UNECE regulations No. 10 und No. 148



ADR approved



Voltage range 10 V to 30 V



Protection class IP6K9K




Operating temperature range: -30°C to +60°C



Customizable cable length and connector options

Technical drawing

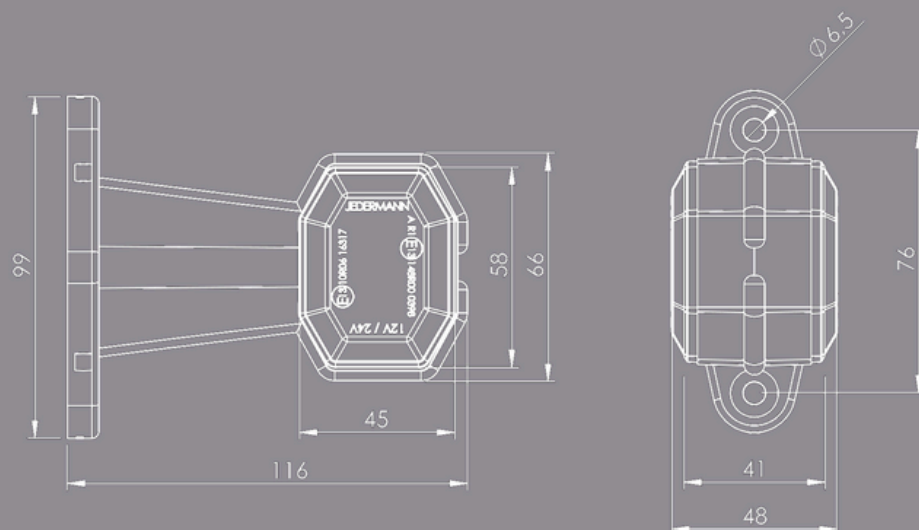

Hauptstraße 33
56291 Hausbay



Jedermann AG
info@jedermann-ag.de



06746-208

Article number



Article number	Connection	Cable length
L021-015-001	Open cable end	1,75 m
L021-015-002	Open cable end	0,5 m
L021-015-003	P&R connector	1,75 m




JEDERMANN

Fahrzeugleuchten

WINGmann I

Mini arm

Characteristics

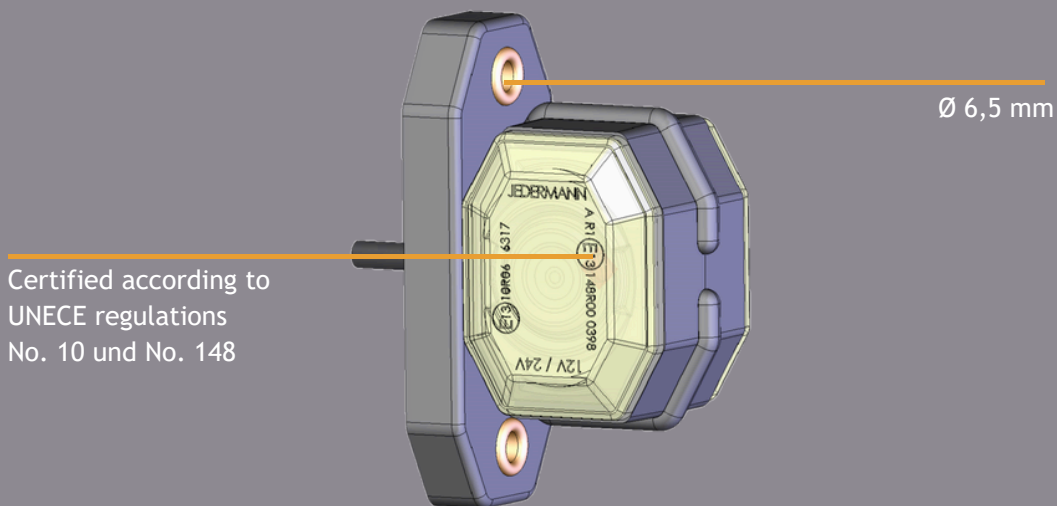

ADR approved



Voltage range 10 V to 30 V



Protection class IP6K9K




Operating temperature range: -30°C to +60°C



Customizable cable length and connector options

Technical drawing

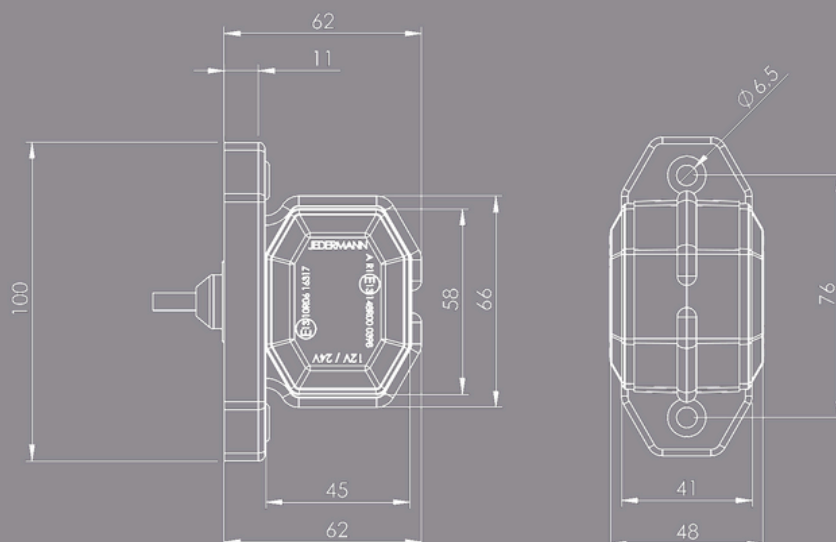

Hauptstraße 33
56291 Hausbay




Jedermann AG
info@jedermann-ag.de



06746-208

Article number

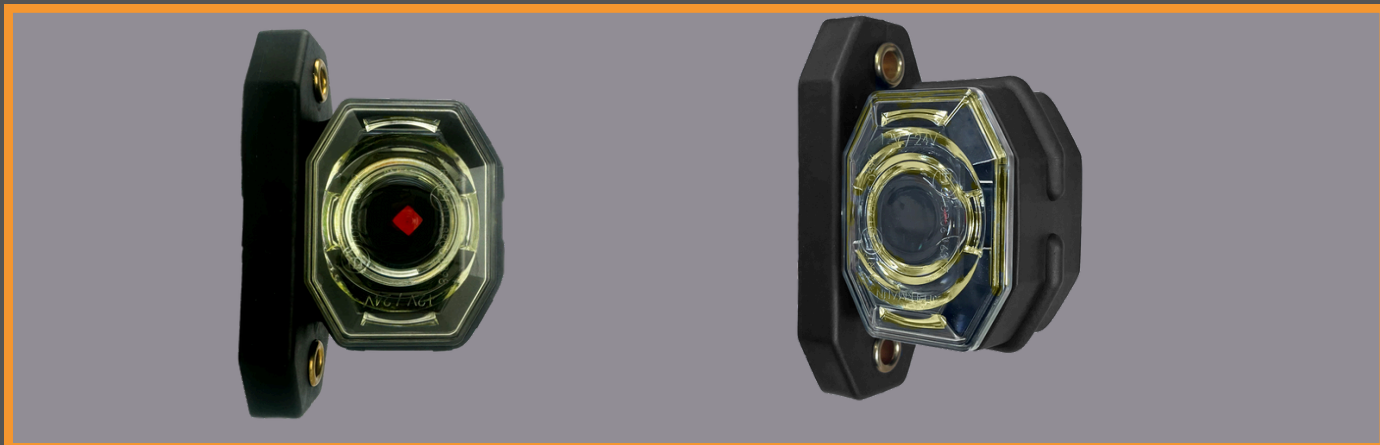

Article number	Connection	Cable length
L022-015-001	Open cable end	1,75 m
L022-015-002	Open cable end	0,5 m
L022-015-003	P&R connector	1,75 m




JEDERMANN

Fahrzeugleuchten

WINGmann I

Pendulum

Characteristics

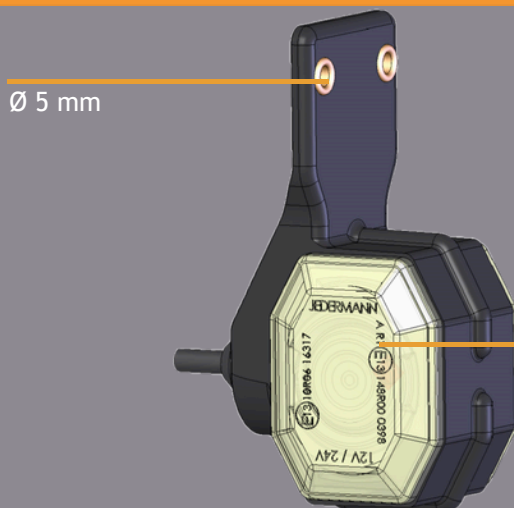

Certified according to
UNECE regulations
No. 10 und No. 148



ADR approved



Voltage range 10 V to 30 V



Protection class IP6K9K





Operating temperature range:
-30 °C to +60 °C



Customizable cable length and connector options

Technical drawing

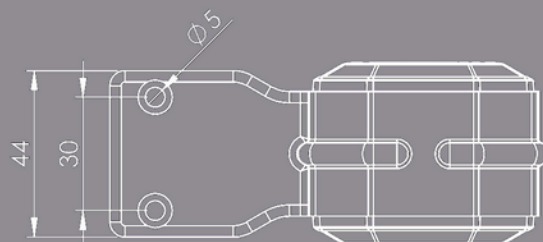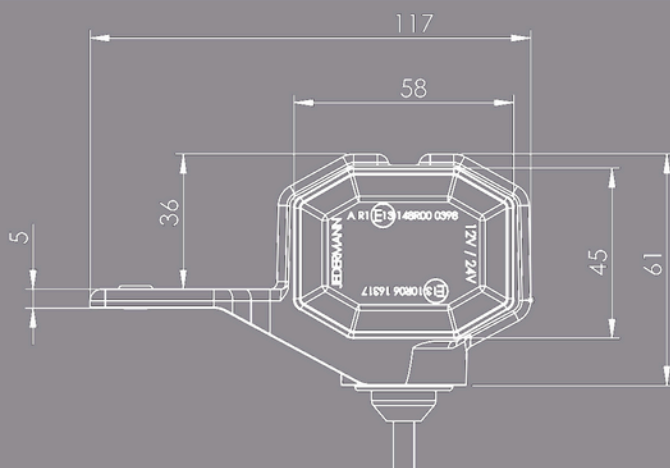

Hauptstraße 33
56291 Hausbay



Jedermann AG
info@jedermann-ag.de



06746-208

Article number



Article number	Mounting side	Connection	Cable length
L023-015-001	right	Open cable end	1,75 m
L023-015-002	left	Open cable end	1,75 m
L023-015-003	right	Open cable end	0,5 m
L023-015-004	left	Open cable end	0,5 m
L023-015-005	right	P&R connector	1,75 m
L023-015-006	left	P&R connector	1,75 m

